

# KNC-p4BR4XIR

4 Megapixel IR Network Camera

Bullet Style Camera with EXIR Super Beam LED, IP66, PoE & DC12V



Plug & Play	4 Megapixel	Smart EXIR 260' Range
True Day/Night	IP66 Weather Resistant	Rugged Housing
PoE & DC12V	Dual Stream Record	Region of Interest
H.264 / H.264+	3D DNR	True WDR
Operates to -22° F	ONVIF	

## Features

- Omni IP 'hands free' Plug-and-Play system: just connect to PoE switch and stream video
- View and record 4MP resolution at up to 20FPS from 1/3" progressive scan CMOS sensor
- Real time 30FPS streaming at 1920x1080 (1080p)/1280x720 (720p)
- Low light sensitivity of .01lux with
  - True Day/Night (ICR) for best daytime color reproduction and low/no light sensitivity
  - Low/no light coverage enhanced by 4 EXIR Super Beam IR LEDs with 260 foot range
  - Smart IR Control of image contrast despite bright, close in objects in scene
- H.264+ substantially reduces main stream bandwidth and HDD file size when used with compatible KT&C NVRs
- True 120db WDR to handle the most challenging of bright or unbalanced lighting conditions
- Extensive OSD capabilities, many controlled directly from Omni IP NVR
  - Dual streaming in H.264/MJPEG with fixed/variable bandwidth control from 32Kb/s to 12.3Mb/s
  - Region of Interest allocates bandwidth to maximize resolution in priority areas within scene
  - Day/night and IR switching control by photo sensor or schedule (or disable IRs if desired)
  - In-camera detection of motion, video loss or tampering with alarm reporting to NVR
  - 3D DNR improves low light image clarity and reduces bandwidth/NVR disk utilization
  - DWDR compensates bright or unbalanced scene lighting
  - BLC specifically for handling scenes with back lit subjects
- Lens focal length of 4mm covers 70° field of view
- Dual PoE/12VDC power
  - PoE for efficiency and convenience
  - 12VDC for legacy system upgrade or beyond PoE cable distance range
- Bullet housing with sunshield is adjustable for 360° pan and rotation, and 90° tilt for flexible positioning
- Operate almost anywhere: IP66 weather resistance and -22°F~140°F temperature range
- Support for Safari/Chrome/FireFox/IE web browsers with free plug-in
- Customize installation by mounting to 4" electrical box or KA-BRJB1 Junction Box; or use KA-BRPM1 Pole Moun, KA-BRCM1 Corner Mount with or without Junction box.

Ordering Information  
KNC-p4BR4XIR: 4mm


[www.ktncusa.com](http://www.ktncusa.com)



# KNC-p4BR4XIR Specifications

<b>Camera</b>	
Parameter	KNC-p4BR4XIR Rugged Bullet Style EXIR Camera with Analytics and H.264+
Image Sensor	1/3" Progressive Scan CMOS
Total Pixels (H x V)	2688x1520 4 Megapixel @ Maximum Resolution
Day & Night	True Day & Night with ICR; Controllable by light sensor or via schedule
Min. Illumination	.01lux @ F1.2, AGC on 0 Lux (IR LED On; IR may be disabled in OSD)
IR LEDs	Four High Power EXIR LED 850nm
IR Distance	260 ft. (80m) Nominal IR performance depends on scene reflectivity
Smart IR	OSD Controlled Off/On
Shutter Speed	1/3s ~ 1/10,000s
WDR	120dB Range; Off/On, Level Adjust
BLC	BLC: Off/Top, Bottom, Left, Right, Center Weighted, or Custom Area
White Balance	AWB; Locked; Incandescence, Warm, Natural or Fluorescent Light
3D DNR	Off/On, Level Adjust
<b>Lens</b>	
Focal Length (standard)	4mm F=2.0
Lens Type	Fixed focal length
<b>Video</b>	
Supported Resolutions	Main Stream: 2688x1520; 1920x1080; 1280x720 Sub Stream: 352x240; 640x360
Maximum Frame Rates	20FPS@2688x1520 ; 30FPS@1920x1080 ; 30FPS@1280x720 30FPS for sub stream
Compression	H.264+ Main Profile, H.264 Main Profile, MJPEG
Bit Rate	Nominal rates from drop down: 256, 512, 1024, 2048, 3072, 4096, 6144, 8192, 12288, 16384 Kbps Customized rates: 32Kbps~16384Kbps
Streaming	Dual-Stream at different frame rates and bandwidth
Region of Interest	Image detail priority/enhancement for up to four user defined areas for main and/or sub stream
Image Settings	Brightness, Contrast, Saturation, Sharpness, Hue, AGC Gain, Image rotation/mirror, 50/60Hz system, Text overlay (Name, Time/Date, Fixed Labels; adjustable for position, size, color, etc.), Privacy masking
<b>Network</b>	
LAN	Ethernet 10/100 Base-T (RJ-45 Type) with weather sealed shell
Security	Multiple user access levels with password protection; Watermarking of captured video IP address filter; IEEE802.1X (Authentication)
Protocol	IPv4, IPv6, HTTP, HTTPS, TCP/IP, ICMP, DHCP, DNS, DDNS, RTP, RSTP, RTCP, uPnP, UDP, IGMP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1X, QoS, Bonjour
Network Storage	Video upload to PC, FTP or NAS
VMS Compatibility	ONVIF (Profiles S & G), PSIA, CGI, ISAPI
Supported Browsers	Internet Explorer, Chrome, FireFox, Safari (with O/S compatible plug-in)
<b>Intelligent Video</b>	
Line Crossing Detection	Up to 4 independent boundaries, each with separate sensitivity control. Arming schedule by day of week and time of day.
Area Intrusion Detection with Loitering Time	Up to 4 independent 4-sided areas, each with separate sensitivity, percentage and loitering time control. Arming schedule by day of week and time of day.
Video Motion Detection	With arming schedule and multiple actions: notify NVR, send email, upload to FTP, trigger alarm output
<b>Alarms</b>	
Alarm Triggers	Intelligent video Motion Detection, Video Loss, Tampering, Network Disconnect, IP Address Conflict, Storage Exception
Alarm Events	Notify NVR, send email, upload to FTP, trigger alarm output
<b>Edge Recording</b>	
NAS	Supports NFS, SMB/CFIS and ANR
<b>General</b>	
Reset Button	Yes
Angle Adjustment	3-Axis Pan: 0~360° Rotation: 0~360° Tilt: 0~75°
Power	PoE class 3 (IEEE 802.3af) 12VDC +/- 10%
	10.5W (IR on; 5.5W nominal)
Interface	8P/8C RJ-45F for Network and PoE
Environmental	IP66 (Weather Resistant)
Operating Temperature	-22 °F ~ 140 °F (-30 °C ~ 60 °C)
Impact Protection	IK-10 Vandal Resistant
Dimensions	Overall length at maximum extension including sun shield: 11.8" (299.7mm) L; Base diameter 4.13" (104.8mm); Camera body with sunshield 3.6" (91.5mm) W x 3.4" (86.4mm) H. In 90° configuration, from rear of base to front of sun shield: 11.31" (287.3mm L), 4.33" (110mm) H. See drawing for details.
Weight	2.65 lbs./1200g
<b>Accessories</b>	
Mounting Options	KA-BRJB1 Junction Box; KA-BRPM1 Pole Mount, KA-BRCM1 Corner Mount with or without Junction Box

## Dimensions: Inches (mm)

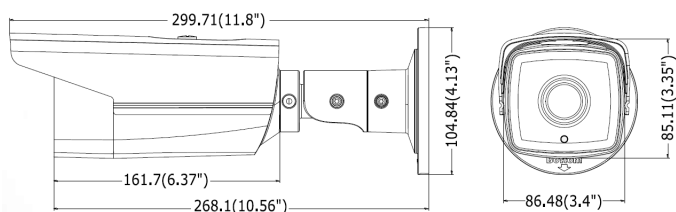

## Accessories

